

Cush-N-Tuf™ Casters feature the durable, yet economical, **Ace-Tuf®** wheels from Ace Products. Cushion rubber tires on high-impact polypropylene wheel centers suit **Cush-N-Tuf™** casters for fragile loads, or for service outdoors, over rough floors, dockboard lips and elevator sills. Unlike pneumatics, **Ace-Tuf®** tires won't deflate and can't be punctured. Industrial duty ball bearings are standard in all wheels.

The casters—cold forged double ball race swivels and matching plate steel rigids—are bright zinc plated to complement the natural corrosion resistance of the **Ace-Tuf®** wheel. (For specifications of **Ace-Tuf®** wheels only, see catalog page 73.) Check the attractive prices, too.

OPTIONAL ACCESSORIES

— see pages 18 & 19.

- Swivel Lock (4 pos. only) and/or Tread Contact Brake available on 8" models only.
- Wheel Brakes (★-ZB [#4008/4108/4208], -CB [#4208]).
- Sealed Swivel Assembly (8" models only).



#S-4010-AT
Swivel Caster


QUALITY FEATURES:

8" models—

Swivel Construction — cold forged steel mounting plate and horn base with formed steel legs continuously welded to horn base.

Kingpin — 5/8" permanent rivet type.

Axle — 1/2" diameter bolt and lock nut, with 1/2" I.D. x 3/4" O.D. spanner bushing.



10" and 12" models—

Swivel Construction — 1/4" thick formed steel mounting plate and horn base. Legs 5/16" x 2 1/2" steel, formed for increased strength and continuously welded to horn base.

Kingpin — 3/4" diameter bolt with lock nut.

Axle — 3/4" diameter bolt with lock nut.


Main and Secondary Swivel Bearings

— hardened steel balls rotate in two heat treated raceways.


Wheel Bearings — 3/4" I.D. heavy duty flange type ball bearings.

Lubrication Fitting — to swivel assembly.

#R-4008-AT Rigid

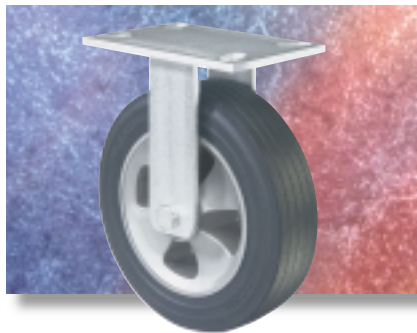

All **Cush-N-Tuf** Rigid models feature rugged plate steel construction, with legs continuously welded inside and outside to mounting plates that match the bolt patterns of the swivels.

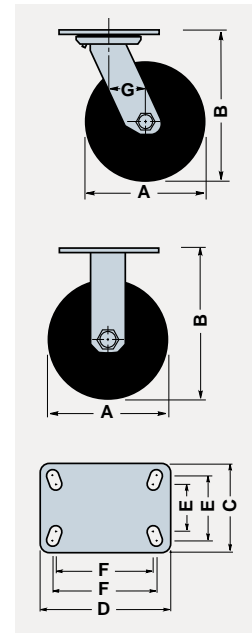

★ = available for 1-2 day **PRONTO®** shipment.

Dimensions in Inches

Wheel		Swivel Caster		Rigid Caster		Load Cap. Lbs.	Overall Height B	Swivel Offset G	Mounting Plate		
Nominal Tire Size	Replacement Number	Catalog Number	Wt. Lbs.	Catalog Number	Wt. Lbs.				Size CxD	Holes ExF	Bolt Size
8 x 2.50	W-8-AT-3/4	★S-4008-AT	8 1/2	★R-4008-AT	7 1/2	400	9 1/2	2 3/8	4 1/2 x 6 1/4	2 1/16 x 4 1/16 slotted to 3 3/8 x 5 1/4	1/2
		★S-4108-AT	8 1/2	★R-4108-AT	8	400	9 1/2	2 3/8	5 x 5 1/2	4 1/8 x 4 1/2	3/8
		★S-4208-AT	8	★R-4208-AT	7 1/4	400	9 1/2	2 3/16	4 x 4 1/2	2 5/8 x 3 3/8 slotted to 3 x 3	3/8
10 x 2.75	W-10-AT-3/4	★S-4010-AT	13 1/4	★R-4010-AT	12 1/4	500	11 1/2	2 1/4	4 1/2 x 6 1/4	2 1/16 x 4 1/16 slotted to 3 3/8 x 5 1/4	1/2
12 x 3.00	W-12-AT-3/4	★S-4012-AT	16	★R-4012-AT	15 1/4	600	13 1/2				