

## Platform Trucks

**Capacity Range**  
2,500 – 3,000 lbs.



**PW915-A Solid hardwood construction, internal sockets.**  
Available with Superstructure Styles A, G, H, and J.



**PM5500-H Sturdy all steel design.**  
Available with Superstructure Styles A, G, H, and J.



**PB1058-A Steel angle frame supports hardwood deck.**  
Available with Superstructure Styles A, C, F, G, H, I, J and K.

### QUALITY FEATURES

- Load wheels 12" x 2½" on 1" diameter axle.
- Swivel caster wheels 8" x 2" on PB1058 and PM5500; 6" x 2" on PW915 except with Pneumatic-tired wheels (12 x 4.10-6 load wheels and 8 x 2.80-4 caster wheels).
- Roller bearings and lube fittings in all wheels.
- Removable pipe handle.


| UNIQUE SPECIFICATIONS |                  |  |              |
|-----------------------|------------------|--|--------------|
| Model No.             | PW915-A          | PB1058-A                               | PM5500-A     |
| Deck                  | 1" hardwood      | 1" hardwood                            | 12 ga. steel |
| Frame                 | 2" x 4" hardwood | 3" x 2" x ⅜" angle                     | 3" channel   |
| Center longitudinal   | 1¾" hardwood     | 1½" hardwood (30" and 36" widths only) | 3" channel   |
| Platform Height       | 14"              | 15"                                    | 12½"         |

### PW915, PB1058 & PM5500 Selection Table

| Platform Size Inches | SELECTION SUFFIX |        |                 |         |            |                                | Approx. Weight Lbs. |              |              |
|----------------------|------------------|--------|-----------------|---------|------------|--------------------------------|---------------------|--------------|--------------|
|                      | Duralast®        | Metal  | Moldon Rubber † | Plastex | Poly-Soft® | Pneumatic Tires (PW915 only) † | Model PW915         | Model PB1058 | Model PM5500 |
| 24 x 48              | -DB3024          | -M2448 | -R2448          | -P2448  | -SPB2448   | -PR2448                        | 170                 | 170          | 205          |
| 30 x 48              | -DB3048          | -M3048 | -R3048          | -P3048  | -SPB3048   | -PR3048                        | 185                 | 180          | 220          |
| 30 x 60              | -DB3060          | -M3060 | -R3060          | -P3060  | -SPB3060   | -PR3060                        | 205                 | 195          | 240          |
| 36 x 60              | -DB3660          | -M3660 | -R3660          | -P3660  | -SPB3660   | -PR3660                        | 215                 | 215          | 265          |
| 36 x 72              | -DB3672          | -M3672 | -R3672          | -P3672  | -SPB3672   | -PR3672                        | 235                 | 235          | 280          |

**TO ORDER, SPECIFY MODEL NUMBER AND SUFFIX**

† Capacity limited to 2,500 lbs. with Moldon Rubber Wheels.  
† Capacity limited to 2,000 lbs. with Pneumatic-tired Wheels.

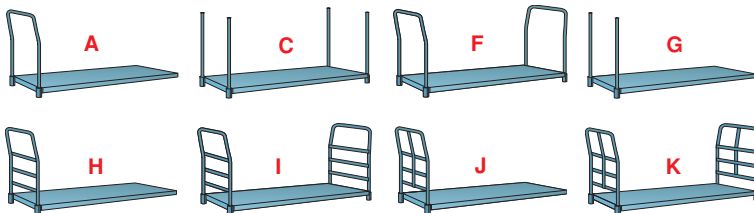

### WHEEL CHOICES for more help, see pages 14 & 15

