

Platform Trucks

Capacity Range
1,000 – 2,000 lbs.



★ **PM5106-H**
Structural steel channel frame assures rugged durability.



★ **PM5108-A**
Smooth, easy to clean steel decks.



★ **PM5112-H**
12" Pneumatic tires for 2,000 lbs. capacity.

TO ORDER, SPECIFY MODEL NUMBER AND SUFFIX

QUALITY FEATURES

- Deck of 12 gauge steel.
- All welded frame and full length center rail of 2" steel channel.
- Roller bearings and lube fittings in all wheels.
- Casters bolted to 3/16" steel angle cross bolsters.
- Removable pipe handle in sockets with set screws.

UNIQUE SPECIFICATIONS

Model PM5106 trucks have 6" x 2" wheels in two swivel and two rigid casters. Platform height 9¾".

Model PM5108 trucks have 8" x 2" wheels in two swivel and two rigid casters (except with Pneumatic tires, size 8" x 2.80/2.50-4, 4-ply rated). Platform height 11¾", 13½" with 8" Pneumatics.

Model PM5112 trucks have 12" dia., 4-ply 4.10/3.50-6 Pneumatic-tired wheels in two swivel and two rigid casters. Platform height 17½".

For aluminum platform trucks in this capacity range, see page 114.


PM5106/5108/5112 Selection Table

Platform Size Inches	SELECTION SUFFIX				Approx. Weight Lbs.
	Moldon Rubber†	Plastex	Pneumatic Tires*	Polylast	
24 x 48★	-R2448★	-P2448★	-PR2448★	-AY2448★	160
30 x 48★	-R3048★	-P3048★	-PR3048★	-AY3048★	170
30 x 60★	-R3060★	-P3060★	-PR3060★	-AY3060★	185
36 x 60	-R3660	-P3660	-PR3660	-AY3660	205
36 x 72★	-R3672★	-P3672★	-PR3672★	-AY3672★	225

† Moldon Rubber wheels limit capacity to 1,400 lbs. with 6" wheels, and 1,800 lbs. with 8" wheels.

* Capacity limited to 1,000 lbs. with 8" Pneumatic tires; 2,000 lbs. with 12" Pneumatics. Not available with 6" Pneumatic tires.

★ Sizes marked by star shipped **PRONTO**® in Superstructure Styles **A, G and H.**

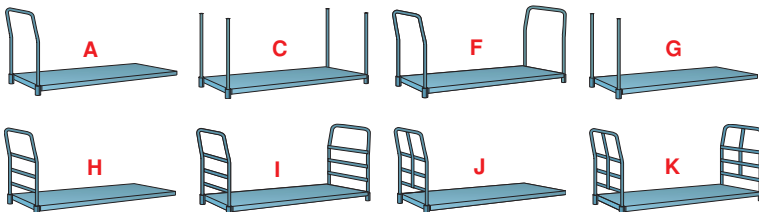

WHEEL CHOICES for more help, see pages 14 & 15

