

Flanged Wheel Casters

Series R-FT — Cap. to 7,500 lbs.



#R-CH-FT82SDH

Hamilton Flanged Wheel Casters, like their V-Grooved counterparts, are also finding increasing industrial applications where floor protection, production-line flow and ease of movement are desired.

Since it is often more convenient to purchase flanged wheels in a plate-type rigid caster ready for mounting, you may choose from the wide selection of popular top plates, overall heights and caster series shown in the chart below.

Note the choice of straight or precision tapered roller bearings in the wheels, all having pressure lubrication fittings in the hubs (except 3½" model). For complete wheel specifications, see flanged wheel chart on facing page.

Hamilton can design and manufacture flanged wheel casters requiring custom specifications, including higher capacities.

OPTIONAL ACCESSORIES
 – see pages 11,18 & 19.

- Cast iron wheels can be cast of **Steeltest** ductile iron (class 80-60-03) for increased shock resistance and capacity.
- Wheel Brakes.
- Wheel Bearing Seals.
- Special Overall Height.
- Swivel Caster Mounting.




#R-CH-FT62H

EHD Models still available, simply change "CH" to "EHD".

★ = available for 1-2 day **PRONTO**® shipment.

SINGLE FLANGED WHEELS

Dimensions in Inches

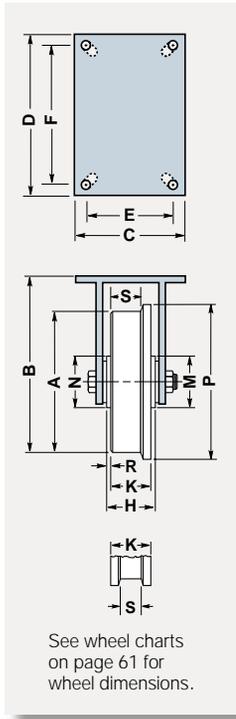

Dia. A	Face S	Wheel Number □	Catalog No. Straight Roller Brgs.	Catalog No. Tapered Bearings	Wt. Lbs.	Load Cap. Lbs.	Overall Height B	Mounting Plate		
								Size C x D	Hole Centers E x F	Bolt Size
3½	1⅞	WFT-35H-¾*	★R-WH-FT35H	R-WH-FT35T	8	500	5⅞	4 x 4½	2⅞ x 3⅞●	⅝
	1⅞	WFT-35H-¾*	★R-HS-FT35H	R-HS-FT35T	8½	500	5⅞	4½ x 6½	2⅞ x 4⅞○	½
4½	1⅞	WFT-45H-1◆	★R-CH-FT45H	R-CH-FT45T	26	3000	7¼	5¼ x 7¼	4⅞ x 6⅞○	½
4½/16	1⅞	WFT-51H-¾	★R-WH-FT51H	R-WH-FT51T	16½	1000	6⅞	4 x 4½	2⅞ x 3⅞●	⅝
	1⅞	WFT-51H-¾	★R-HS-FT51H	R-HS-FT51T	17	1000	6⅞	4½ x 6½	2⅞ x 4⅞○	
5	2⅞	WFT-5FH-1♠	★R-EHD-FT5FH	★R-PSD-FT5FT	32	4200♠	8	5½ x 7½	4⅞ x 6⅞	
6⅞	1⅞	WFT-6H-1	★R-CH-FT6H	R-CH-FT6T	31½	2000	8⅞	5¼ x 7¼	3⅞ x 5¼ slotted to 4⅞ x 6⅞	½
	1⅞	WFT-61H-1◆	R-CH-FT61H	R-CH-FT61T	33	2500	8⅞			
7⅞	1¾	WFT-8H-1	R-CH-FT8H	R-CH-FT8T	33½	2500	8⅞			
	2¼	WFT-82SDH-1◆	R-CH-FT82SDH	R-CH-FT82SDT	38	3500	10⅞			
8	2¼	WFT-82H-1	★R-CH-FT82H	R-CH-FT82T	38	3000	10¼			
8⅞	2¼	WFT-9H-1	R-CH-FT9H	R-CH-FT9T	34½	2000	10⅞			
10	2½	WFT-10H-1½	R-MD-FT10H	R-MD-FT10T	75	4000	13			
14	2¾	WFT-14H-1½	R-MD-FT14H	R-MD-FT14T	72	3000	16½	8½ x 8½	7 x 7	⅝
14⅞	2⅞	WFT-15-2H-1½◆	R-MD-FT15H	R-MD-FT15T	137	7500	16⅞			

DOUBLE FLANGED WHEELS

5	1⅞	WFT-53FH-1♠	★R-EHD-FT53FH	R-PSD-FT53FT	33	4200♠	8	5¼ x 7¼	3⅞ x 5¼ slotted to 4⅞ x 6⅞	½
6	2⅞	WFT-62H-1	★R-CH-FT62H	R-CH-FT62T	34	2500	8			
9	1¼	WFT-91H-1	R-CH-FT91H	R-CH-FT91T	32	1500	11			
9¼	1½	WFT-92H-1	★R-CH-FT92H	R-CH-FT92T	36	2500	11⅞			

□ With straight roller bearings. For catalog number of corresponding tapered bearing wheels, consult factory.
 ♠ Drop-forged steel. Roller bearing capacity shown increases to 6,000 lbs. when equipped with tapered roller bearings.
 * This wheel lubricated through lube axle.
 ◆ Steeltest ductile iron.
 ○ Slotted to 3⅞" x 5¼".
 ● Slotted to 3" x 3".