

Two Wheel Trucks

Capacity Range

400 – 5,000 lbs.



★HM69
Capacity 800 lbs.
Shippable **PRONTO®!**

Appliance Truck

Lightweight—only 50 lbs.—but ruggedly constructed of welded steel tubing. Built to handle refrigerators, freezers, stoves, TV's, store fixtures and furniture of all kinds.

Ratchet securely tightens 124" long web belt. Stair climbers are roller bearing, "crawler" type. Load contact surfaces fully padded.


Vulcalite non-marking rubber-tired wheels 6" x 2" with roller bearings and lube fittings.

- Overall height60"
- Frame width16"
- Nose width24"
- Nose depth5"
- Axle diameter5/8"
- FinishRed Enamel
- Capacity800 lbs.

★LE555, ★LE556, ★LE557

Lever Dollies

Hamilton Lever Dollies, or Pry Bars, have heavy 6" x 3" tapered steel noses and select, kiln dried ash handles. Commonly used in pairs to pry under ends of bulky crates, cases or machinery. Three sizes are available for varying capacities. The 3/4" round axle is welded to a solid steel back plate. Choice of 5" x 2" Metal or Plastex roller bearing wheels.

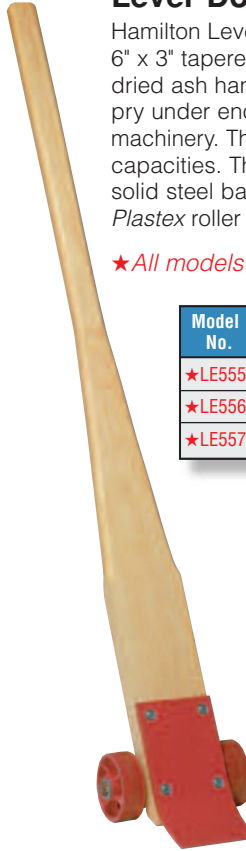

★All models shippable **PRONTO®** via UPS.

Model No.	Lifting Capacity	Lifting Height	Overall Length	Approx. Weight
★LE555	3500 lbs.	8"	5 ft.	30 lbs.
★LE556	4200 lbs.	8"	6 ft.	37 lbs.
★LE557	5000 lbs.	8"	7 ft.	44 lbs.

**TO ORDER SPECIFY MODEL NUMBER AND SUFFIX:
-M FOR METAL WHEELS,
-P FOR PLASTEX WHEELS.**

★HM82
Large 12" Ace-Tuf® Wheels.
Shippable **PRONTO®!**

Dual Cylinder Truck

Easily carries a 300 cu. ft. oxygen and a 300 cu. ft. acetylene tank. Has adjustable locking chain and accessory tray 22" x 5" x 3" deep. All-welded construction. 12 x 3.00 Ace-Tuf® rubber-tired, ball bearing wheels.

- Height42½"
- Frame width25"
- Nose depth13"
- Axle diameter3/4"
- Weight48 lbs.
- Capacity600 lbs.



★HM91
Shippable **PRONTO®** via UPS.

Cylinder Truck

For single tank or cylindrical object up to 10" diameter. 1 1/16" tubular steel construction with large safety nose plate, quick-acting locking chain, full-size stair skids, and non-slip handle grips. Choose 6 x 2.00 Semi-Pneumatic wheels (HM91-6SP), 8 X 2.50 Ace-Tuf® wheels (HM91-8AT) or 10 x 2.75 Ace-Tuf® wheels (HM91-10AT). Ball bearings in all wheels.

- Handle length46"
- Frame width15"
- Nose depth8"
- Axle diameter5/8"
- Weight38 lbs.
- Capacity400 lbs.

