

Tilt-Type Platform Trucks

Capacity Range
1,500 – 3,500 lbs.

QUALITY FEATURES

- Load wheels 12" x 3" on 1¼" diameter axle with 6" x 2" end casters, or 16" x 3" on 1¼" diameter axle with 8" x 2" end casters.
- Roller bearings and lube fittings in all wheels.
- Choice of one or two swivel casters at each end
- See chart for Distinguishing Specifications.

Available with Superstructure Styles A, C, F, G, H, I, K, L and M.

To order PB1120/1140 and PM5520/5540, use platform size and wheel selection table on page 108.

DISTINGUISHING SPECIFICATIONS		
Model Number	PB1120/1140	PM5520/5540
Deck	1" hardwood	12 ga. steel
Frame		
12" & 6" Wheels	3" x 2" x ⅜" angle	3" channel
16" & 8" Wheels	3" x 2" x ⅜" angle	3" channel
Center longitudinal	2" x 2" x ⅜" angle	3" channel
Platform Height		
12" & 6" Wheels	15"	15"
16" & 8" Wheels	17"	17"

QUALITY FEATURES

- Sanded and varnished deck of 1" select hardwood on 1½" x 5" frame.
- Reinforcing steel tie rod across each end.
- Countersunk screw nails; lock washers on all bolts.
- Load wheels 12" x 2½" Metal, Moldon Rubber, or *Plastex* on 1" diameter axle.
- Swivel casters equipped with 6" x 2" wheels having roller bearings and lube fittings in all wheels.
- Style M stakes 29" high above deck.
- Platform height 14¼". Capacity 1,500 lbs.

Available with Superstructure Styles A, C, F, G, H, I, J, K, L and M.

★ All models shippable PRONTO® with Superstructure Style M.

★ = two-day

PRONTO® shipment. **PW800 Selection Table**

Platform Size Inches	SELECTION SUFFIX			Approx. Weight Lbs
	Metal	Moldon Rubber	Plastex	
24 x 48★	-MH2448★	-R2448★	-P2448★	130
30 x 48★	-MH3048★	-R3048★	-P3048★	145
30 x 60★	-MH3060★	-R3060★	-P3060★	165


TO ORDER, SPECIFY MODEL NUMBER AND SUFFIX



PB1120-A

One swivel caster each end, tilt-type.

Model PB1140-A has two swivel casters each end.

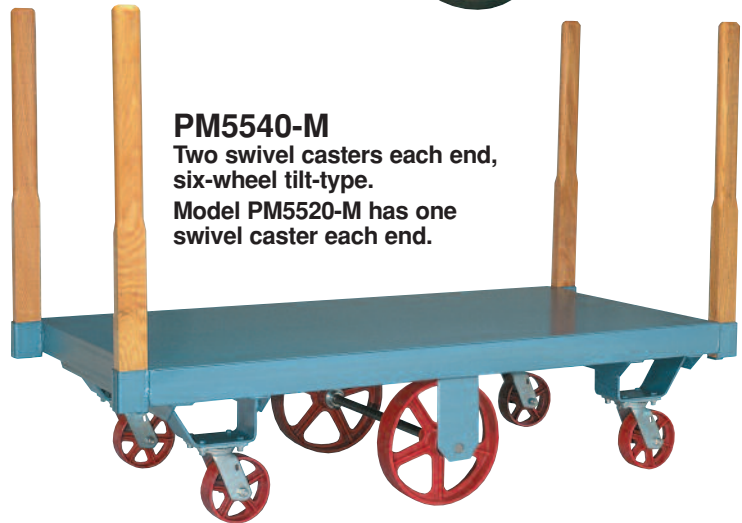

PM5540-M

Two swivel casters each end, six-wheel tilt-type.

Model PM5520-M has one swivel caster each end.



★PW800-M
Woodworking industry favorite.

